


A disconnecting means must be installed within sight from equipment and at least 15m (5 feet) from the inside walls of the Hot Tub

P/N H-0055\_Rev 07

Global SPA Components Copyright Feb 2011  
Euro Spa Controller Rev 102 P/N PCB-002

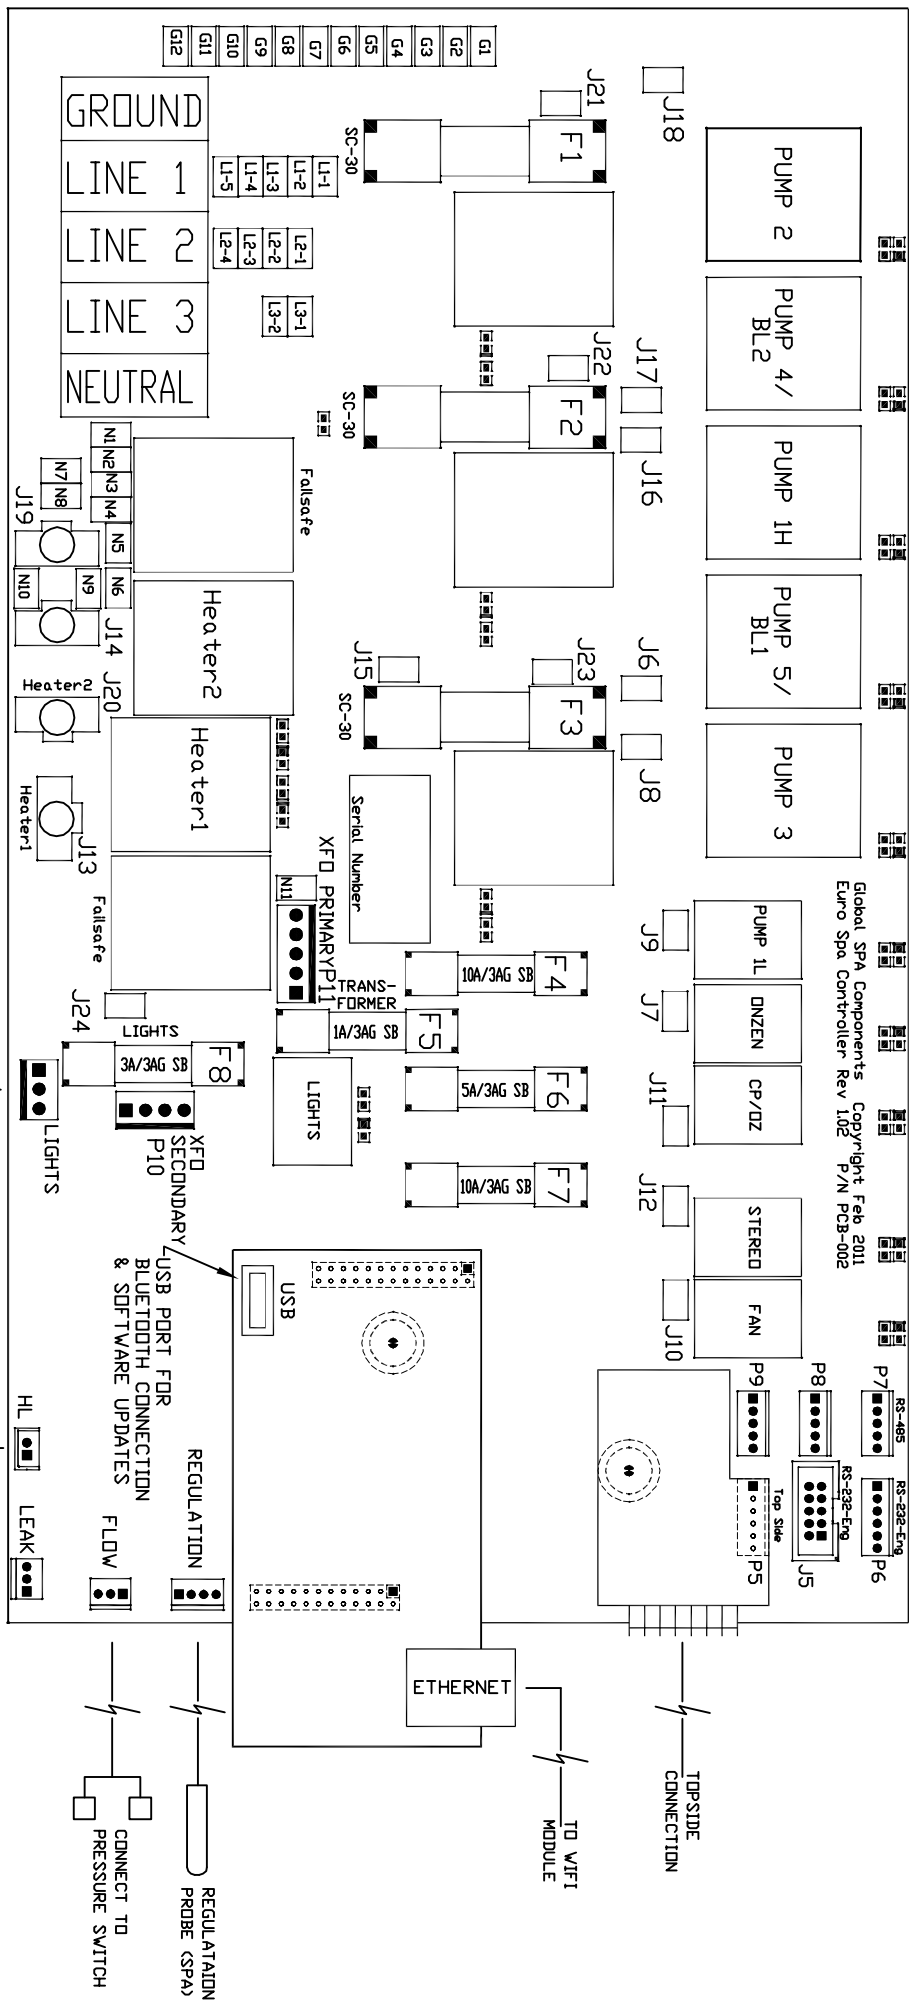

PUMP 1 - 9A MAX	
VOLTAGE	230V
GREEN/YELLOW	G3
BROWN/HIGH	J16
BLUE	N3
BLACK/LOW	J9
PUMP 2H - 9A MAX	
VOLTAGE	230V
GREEN/YELLOW	G1
BLACK/HIGH	J18
BLUE	N1
PUMP 3H - 9A MAX	
VOLTAGE	230V
GREEN/YELLOW	G5
BROWN/HIGH	N4
BLUE	J8
PUMP 4H/BL2 - 9A MAX	
VOLTAGE	230V
GREEN/YELLOW	G2
BROWN/HIGH	J17
BLUE	N2

PUMP 5H/BL1 - 9A MAX	
VOLTAGE	230V
GREEN/YELLOW	G4
BROWN/HIGH	J6
BLUE	N4
DNZEN - 1A MAX	
VOLTAGE	230V
GREEN/YELLOW	G7
BROWN	J7
BLUE	N6
CP/DZ - 1A MAX	
VOLTAGE	230V
GREEN/YELLOW	G8
BROWN	J11
BLUE	N7
HEATER - 26A MAX	
VOLTAGE	230V
GREEN/YELLOW	G1
BLACK/HTRL2	J20
BROWN/HTRL1	J13
WHITE/HTRL2	J14
WHITE/HTRL1	J19

STEREO - 3A MAX	
VOLTAGE	230V
GREEN/YELLOW	G9
BROWN	J12
BLUE	N8
FAN - 5A MAX	
VOLTAGE	230V
GREEN/YELLOW	G10
BROWN	J10
BLUE	N8
TRANSFORMER	
VOLTAGE	230V
GREEN/GROUND	G12/GND-Bar
BLUE/NEUTRAL N-10	N11
BLUE & BROWN/Primary	P11
RED & RED/Secondary	P10

SHORTING JUMPERS	
PUMP 3 JUMPER RED/L3-1	J15
HEATER 1 JUMPER RED/L2-1	J24

IF CONNECTING 3 PHASE:	
GROUND	GND
LINE 1	L1
LINE 2	L2
LINE 3	L3
NEUTRAL	N
IF CONNECTING 2 PHASE:	
GROUND	GND
LINE 1	L1
LINE 2	L2
NEUTRAL	N
IF CONNECTING 1 PHASE:	
GROUND	GND
LINE 1	L1
NEUTRAL	N
JUMPER YELLOW/L1-5	L2-4
JUMPER ORANGE/L1-4	L3-2

FUSE	SIZE	PROTECTS
F1	SC-30	P2,P4/BL2
F2	SC-30	PIH,P5/BL1
F3	SC-30	P3
F4	10A/3AG SB	P1L,DNZEN
F5	1A/3AG SB	TRANSFORMER
F6	5A/3AG SB	CP/DZ
F7	10A/3AG SB	STEREO,FAN
F8	3A/3AG SB	LIGHTS

LIGHT CONNECTOR  
J3 BLACK/WHITE  
LIGHTS  
12 VAC, 12VA MAX